


QUANTITY SURVEYING PORTFOLIO

Ubiquity Ayala Bacolod

Sanitized architectural
and MEPF cost proposal

4F AYALA MALLS CAPITOL CENTRAL
BACOLOD CITY, PHILIPPINES

Prepared by
Engr. Mark Raphael P. Tive
Quantity Surveyor / Cost Estimator

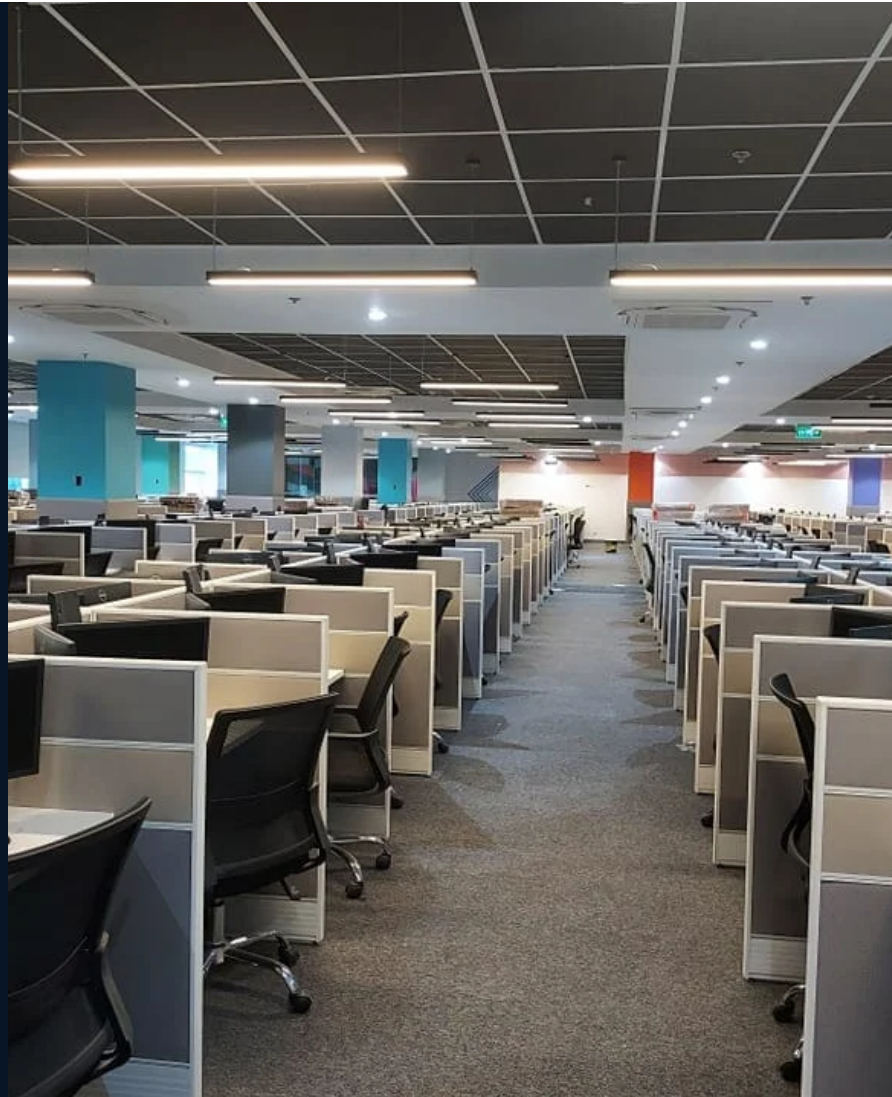

PORTFOLIO EDITION | SELECTED
EVIDENCE

PROJECT OVERVIEW

A large-scale corporate office fit-out priced across architecture and building services.

This sample demonstrates the preparation of measurable work packages, unit-rate pricing, trade summaries and commercial presentation. It contains selected evidence from the underlying proposals and intentionally omits sensitive supporting information.

CSA - VAT EXCLUSIVE PHP 151.40M Civil, architectural, furniture and fit-out proposal	MEPF - VAT INCLUSIVE PHP 104.93M Electrical, electronics, fire, mechanical and plumbing
---	--

LOCATION	4F Ayala Malls Capitol Central, Bacolod City
PROJECT TYPE	Corporate office / contact-center fit-out
ROLE	Quantity surveying and cost proposal preparation
COVERAGE	CSA, furniture, electrical, ELV, FDAS, fire protection, mechanical and plumbing
DOCUMENT BASIS	Selected priced BOQ lines and package summaries from the supplied proposals

COST STRUCTURE

Package-level commercial overview

The two proposals use different VAT bases. Values are therefore shown exactly as stated and are not combined on this page.

CSA / FIT-OUT	AMOUNT (PHP)	MEPF	AMOUNT (PHP)
Preliminaries	15,055,000.00	Electrical	33,770,744.00
Floor finishes	11,333,818.00	Electronics / ELV	17,286,523.50
Partitioning	17,606,633.00	Fire protection	7,987,186.00
Wall finishes	15,743,101.26	Mechanical	44,624,342.40
Ceiling works	9,686,086.92	Plumbing	1,257,442.00
Doors/windows	8,337,000.00	TOTAL - VAT INCLUSIVE	104,926,237.90
Furniture & joinery	63,560,260.00		
Other selected divisions	10,079,784.00		
TOTAL - VAT EXCLUSIVE	151,401,684.18		

ARCHITECTURAL BOQ

Selected fit-out and furniture measurements

Representative priced items demonstrate measurement across finishes, partitions, ceilings, openings and workplace furniture.

TRADE	DESCRIPTION	QTY	UNIT	RATE (PHP)	AMOUNT (PHP)
Flooring	Carpet flooring - general areas	3,232.30	m2	1,400.00	4,525,220.00
Flooring	Reception/cafeteria floor tiles	886.51	m2	1,100.00	975,161.00
Flooring	Timber-look floor planks	929.51	m2	1,100.00	1,022,461.00
Flooring	Floor screeding / levelling	5,184.12	m2	400.00	2,073,648.00
Partitions	Double-layer drywall partition	4,065.57	m2	1,400.00	5,691,798.00
Partitions	Single-layer drywall partition	3,668.64	m2	1,100.00	4,035,504.00
Partitions	Drywall cladding / wall lining	2,675.58	m2	950.00	2,541,801.00
Partitions	Framed glass partition	771.43	m2	5,000.00	3,857,150.00
Wall finishes	General white wall paint	2,845.92	m2	700.00	1,992,144.00
Wall finishes	Cement wall finish	7,480.26	m2	700.00	5,236,183.26

ARCHITECTURAL BOQ - CONTINUED

Selected fit-out and furniture measurements

TRADE	DESCRIPTION	QTY	UNIT	RATE (PHP)	AMOUNT (PHP)
Wall finishes	Acoustic wall panel - conference rooms	1,071.36	m2	700.00	749,952.00
Wall finishes	Vinyl baseboard	3,616.40	lm	450.00	1,627,380.00
Ceilings	Perforated acoustic ceiling	2,214.89	m2	1,600.00	3,543,829.92
Ceilings	Ordinary gypsum ceiling	1,794.36	m2	1,200.00	2,153,232.00
Ceilings	Moisture-resistant gypsum ceiling	917.00	m2	1,200.00	1,100,400.00
Doors	Aluminum-framed glass door	66	set	55,000.00	3,630,000.00
Windows	Roller blinds	900	sq.ft	750.00	675,000.00
Furniture	General task chair	856	nos.	20,300.00	17,376,800.00
Furniture	General workstation table	853	nos.	25,700.00	21,922,100.00
Furniture	Phone lockers	450	nos.	1,550.00	697,500.00



MEPF BOQ

Electrical, lighting and containment

Representative quantities show cable, device, luminaire and raceway pricing with traceable units and extensions.

TRADE	DESCRIPTION	QTY	UNIT	RATE (PHP)	AMOUNT (PHP)
Electrical	3.5 mm2 THHN cable	44,466	lm	20.00	889,320.00
Electrical	22 mm2 THHN cable	6,564	lm	114.00	748,296.00
Electrical	200 mm2 THHN cable	3,376	lm	980.00	3,308,480.00
Electrical	Table-mounted duplex outlet	1,058	set	305.00	322,690.00
Electrical	Floor-mounted duplex outlet	82	set	1,865.00	152,930.00
Lighting	18W LED downlight	1,988	set	1,460.00	2,902,480.00
Lighting	600 x 1200 mm LED panel light	904	set	2,100.00	1,898,400.00
Lighting	Battery pack	320	set	5,030.00	1,609,600.00
Raceways	15 mm IMC conduit	34,460	lm	122.00	4,204,120.00
Raceways	25 mm IMC conduit	3,456	lm	190.00	656,640.00

MEPF BOQ - CONTINUED

ELV, life safety and plumbing

Selected items cover fire detection, public address, structured cabling, access control, CCTV rough-in and plumbing services.

TRADE	DESCRIPTION	QTY	UNIT	RATE (PHP)	AMOUNT (PHP)
FDAS	Addressable smoke detector	240	set	4,000.00	960,000.00
FDAS	Fire alarm cable - #18 2/C	1,500	lm	140.00	210,000.00
Public address	6W ceiling-mounted speaker	280	ea.	2,200.00	616,000.00
Public address	PA cable - #18 2/C	1,500	lm	130.00	195,000.00
Structured cabling	CAT6 UTP cable	40,700	lm	25.00	1,017,500.00
Structured cabling	Universal I/O - single port	880	set	325.00	286,000.00
Access control	Door contact	14	set	22,500.00	315,000.00
CCTV rough-in	20 mm IMC pipe	5,460	set	125.00	682,500.00
Plumbing	40 mm PPR water-supply pipe	144	lm	1,105.00	159,120.00
Plumbing	100 mm PVC sanitary pipe	240	lm	632.00	151,680.00
Plumbing	15 GPM grease trap	4	pcs.	47,400.00	189,600.00

BASIS & QUALIFICATIONS

How to read this portfolio sample

- 01

This is a curated portfolio extract, not a tender document or an offer to perform the work.
- 02

Quantities, units, rates and extensions are selected from the supplied project cost proposals.
- 03

The CSA proposal total is VAT exclusive; the MEPF proposal total is VAT inclusive.
- 04

Displayed package totals should not be combined without first normalizing their VAT basis.
- 05

Rates are project- and date-specific and should not be treated as current market benchmarks.
- 06

Descriptions have been shortened only where necessary for presentation; the pricing basis remains identifiable.
- 07

Confidential supporting correspondence, detailed commercial conditions and complete source schedules are intentionally omitted.

ESTIMATING
CAPABILITY

Drawing review | Quantity take-off | Unit-rate pricing | BOQ compilation | Cost summaries | MEPF coordination